

Ladder with anchor point

Description:

The **SECURECHELLE® double** is a means of technical access matching the shape of sloping roofs, domes, inclined planes, etc.
The bars are connected by a textile strap and fixed to a rubber footing.

When it is attached to a compliant anchor point, each bar then itself becomes an EN 795 class A anchor point.

Supplied in 2.70m lengths, they can be joined end to end using the carabiners sewn to the end of each strap.

Up to 5 ladders (Contact us for higher volumes).

A strap lifter, at the top, allows the ladder to be installed on a single attachment point.
Installs and is used without damaging fragile supports.

Details:

Material: Aluminium, stainless steel, textile, rubber

Finish: Raw

Setup: Delivered with manuals and drawings available online at: <http://extranet.somain.fr>

i Additional information

Length: 2700 mm

Overall width: 404 mm

Useful width: 286 mm

Bar centre-to-centre distance: 270 mm

Weight: 16 kg


REF : 100490

SECURECHELLE® double.

Length: 2 m 70



: Options

When two **SECURECHELLE® double** are installed side by side, they can be used as support for a telescopic work platform.

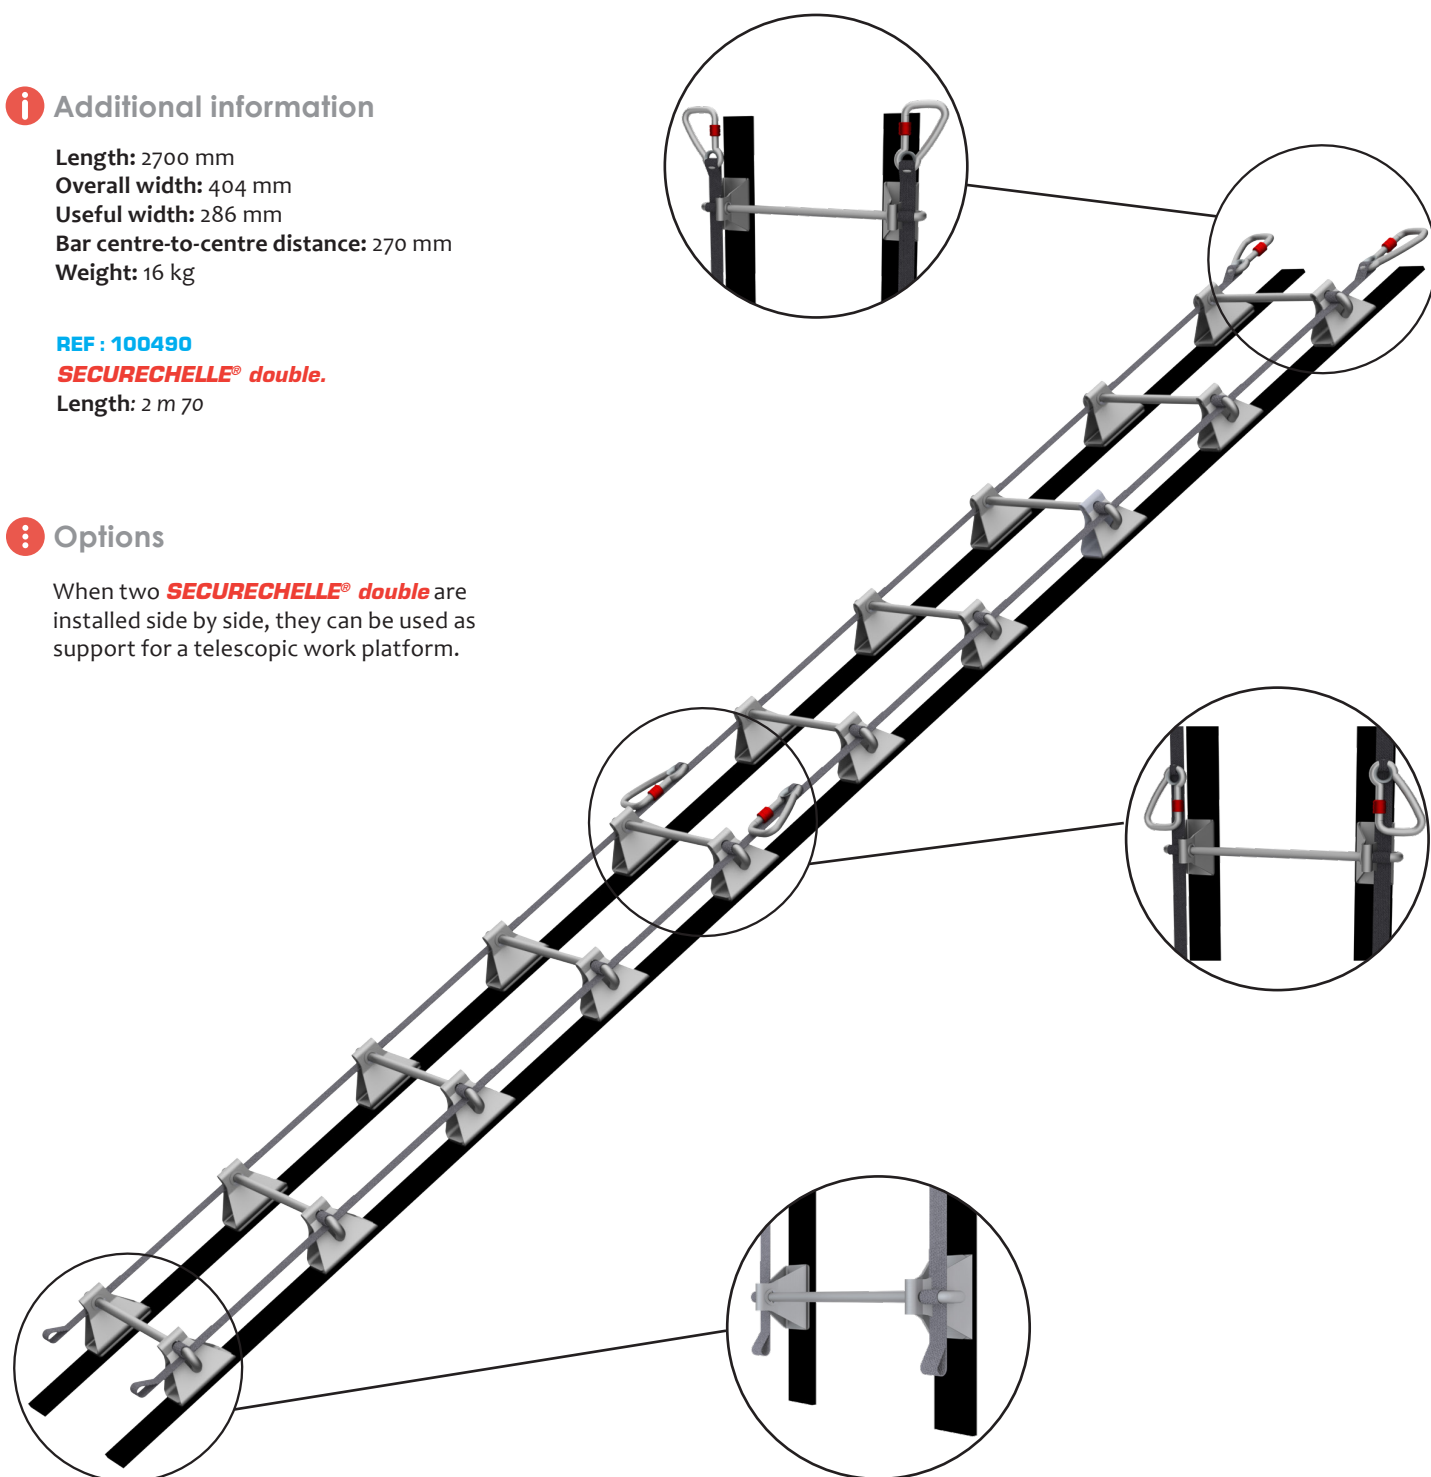

+ Elements

SOMAIN has developed a telescopic gangway which can be installed between two **SECURECHELLE® double**.

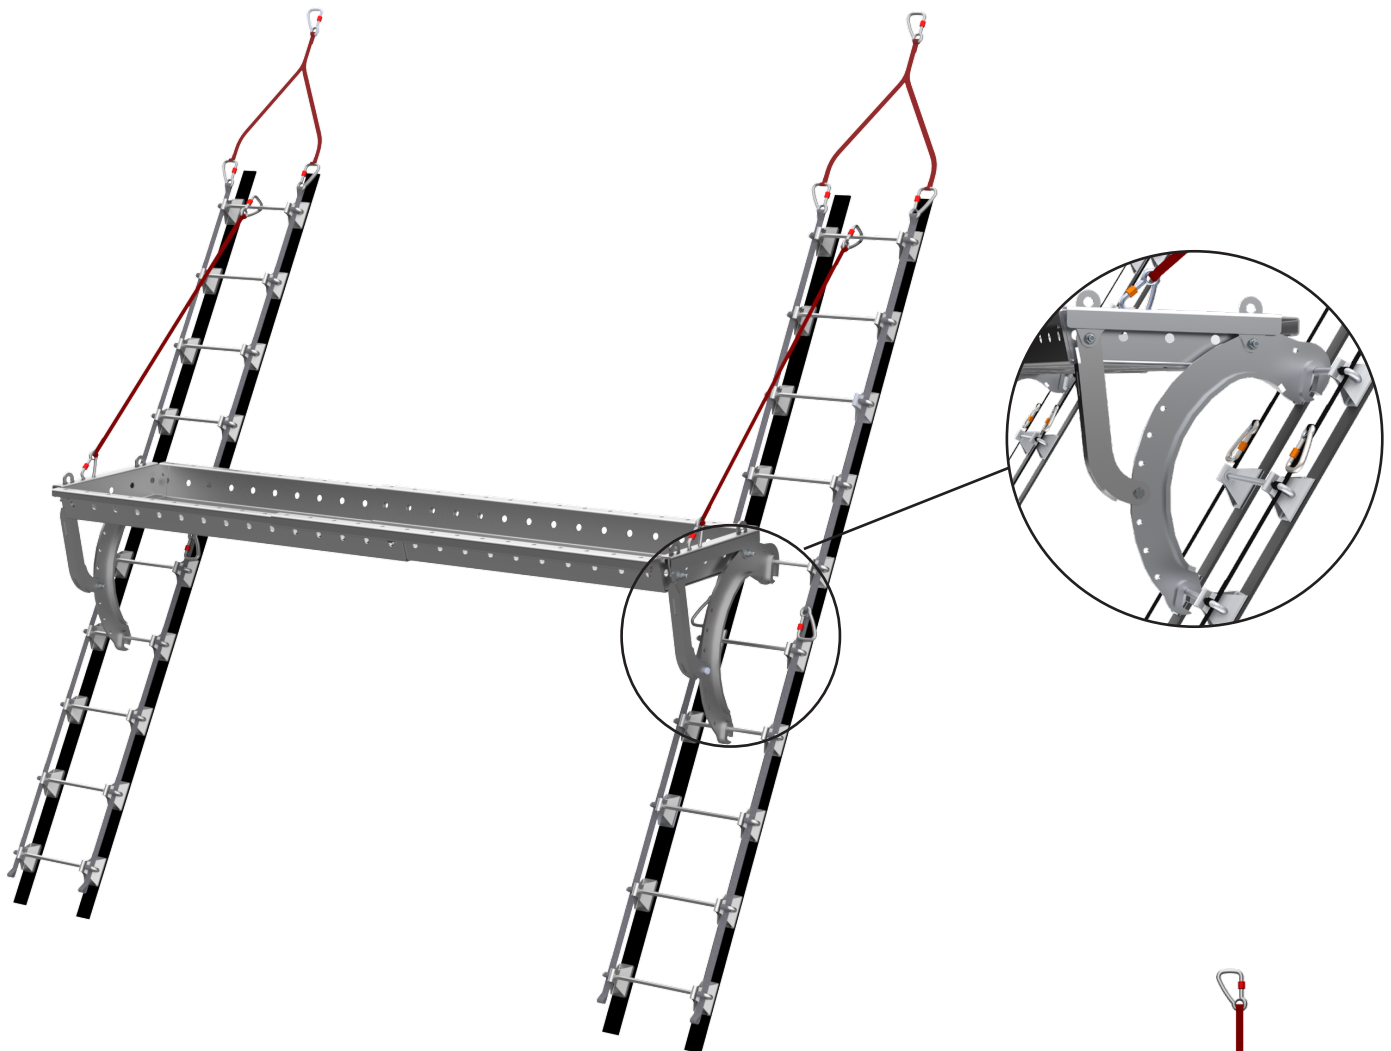

REF : 100170
Strap lifter.
Length: 490 mm



REF : 100561
Telescopic gangway aluminium with 2 arcs support kit.
Length: adjustable 1500 to 2500 mm



REF : 100040
Zinc-plated steel carabiner (2 for each gangway).



REF : 100034
Positioning lanyard 4 metres (2 per gangway).
Length: adjustable