

## Flexible ladder with rungs in the axis and offset

### Description:

The flexible **SECURECHELLE®** souple à barreaux dans l'axe is a means of vertical technical access.

This is a temporary access solution. Thanks to the ladder textile strap uprights, it can be rolled up and stored when not in use.

Delivered in length of 3.20m.

Up to 5 ladders can be assembled end to end by bolting. (Please contact us for higher volumes) A lifting beam at the top allows the ladder to be installed on a single fixing point.

### Details:

**Material:** Aluminium and textile strap

**Finish:** Raw or powder-coated

**Setup:** Delivered with manuals and drawings available online at: <http://extranet.somain.fr>



### Ladder with bars in the axis

### **i** Additional information

**Length:** 3200 mm

**Overall width:** 516 mm

**Useful width:** 444 mm

**Bar centre-to-centre distance:** 270 mm

**Weight:** 10 kg

**REF : 100488**

**SECURECHELLE®** souple à barreaux dans l'axe.


Length: 3m20



**REF : 100169**

**Aluminium lifting beam.**

17.3 mm diameter hole for fixing to the host structure.

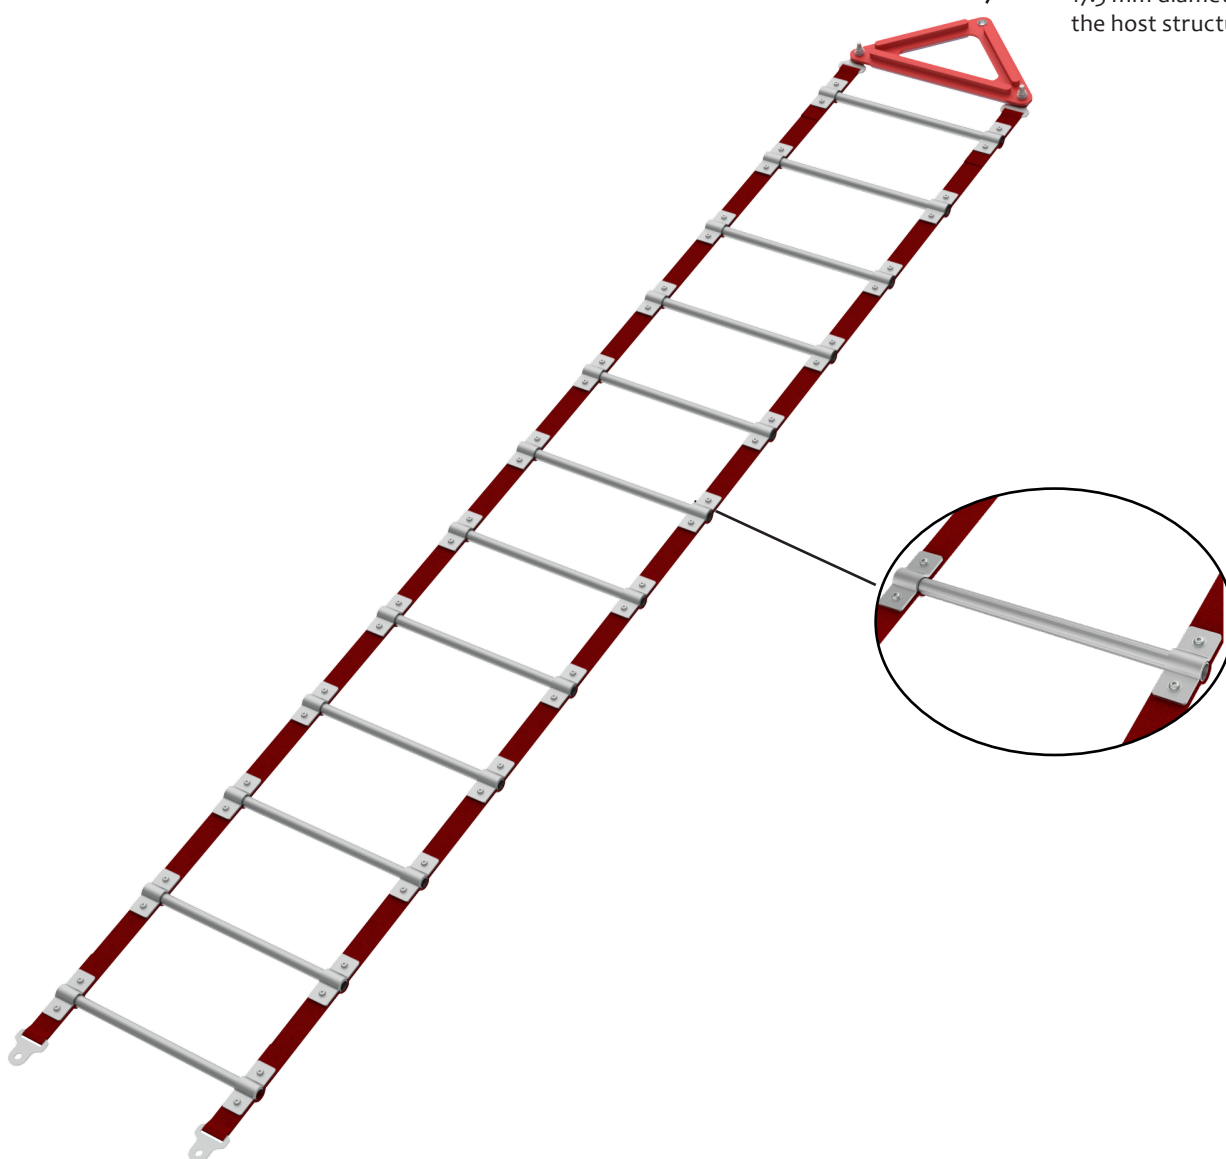

## Flexible ladder with rungs in the axis and offset

### Description :

The flexible **SECURECHELLE® souple à barreaux décalés** matching the shape of sloping roofs, domes, inclined planes, etc.

This is a temporary access solution. Thanks to the ladder textile strap uprights, it can be rolled up and stored when not in use.

Delivered in length of 3.20m.

Up to 5 ladders can be assembled end to end by bolting. (Please contact us for higher volumes) A lifting beam at the top allows the ladder to be installed on a single fixing point.

For permanent outdoor installation, we offer a variant with a stainless steel strap replacing the textile straps.

### Details:

**Material :** Aluminium and textile strap

**Finish :** Raw or powder-coated

**Setup :** Delivered with manuals and drawings available online at: <http://extranet.somain.fr>



### Ladder with staggered bars

### **i** Additional information

**Length:** 3200 mm

**Overall width:** 516 mm

**Useful width:** 444 mm

**Bar centre-to-centre distance:** 270 mm

**Weight:** 12 kg

**REF : 100485**

**SECURECHELLE® souple à barreaux décalés.**

**Length:** 3 m 20



**REF : 100487**

**SECURECHELLE® souple à barreaux décalés sur feuillard inox.**

**Length:** 3 m 20

### **⋮** Options

**Stainless steel strip:** The textile straps used for the uprights can be replaced by a stainless steel strap of the same size for permanent installation.

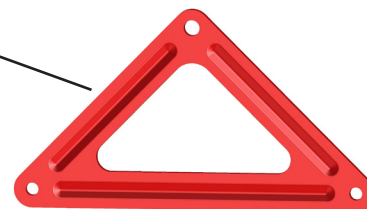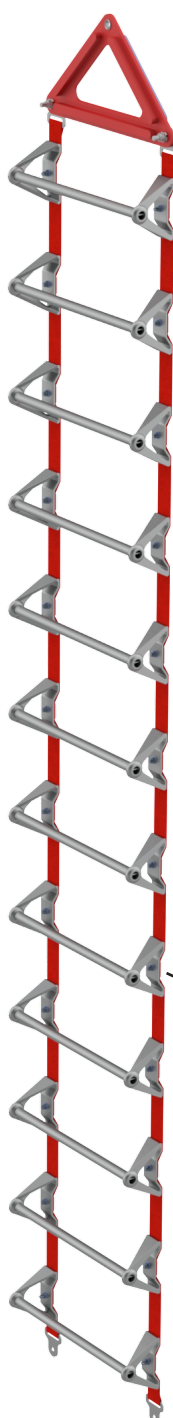

**REF : 100169**

**Aluminium lifting beam.**

17,3 mm diameter hole for fixing to the host structure.

