

Mobile fall arrester

Description:

Designed to be used on the entire range of **SECURIFIL® verticale** lifelines on a galvanized or stainless-steel cable with a diameter of 8 mm 7x19. Integration of an energy absorber and a double action opening system & anti-inversion for more security.


For a user of 50 kg (equipment not included) up to 140 kg (equipment included).

Advantages

The SKC H04 EVO fall arrester can be used and is certified on all **SECURIFIL® verticale** versions.

The SKC H04 EVO is an individual P.P.E. that is used attached to a harness compliant to EN-361 (see opposite drawing).

Traceability by unique serial number and production date.

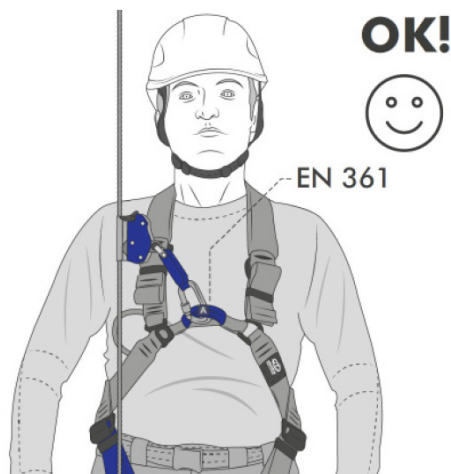


Details:

Material: Inox / Aluminium / Textile

Certificate of Conformity on:

<https://www.somain.fr/documents/ddcskcho4evo.pdf>

Setup: Delivered with manuals and drawings available online at: <http://extranet.somain.fr>

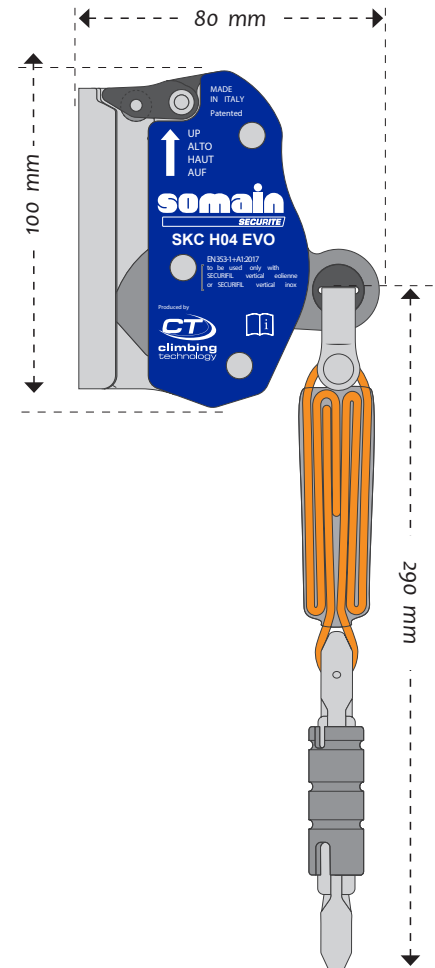

Usage characteristics

The SKC H04 EVO is a fall arrester for steel or stainless-steel cable diameter 8 mm 7x19, integrating a textile absorber and a carabiner.


Weight: 550 grams without packaging

Operating temperatures: -30° / + 50° C

User weight: 50 kg (equipment not included) to 140 kg (equipment included)

Users: 3 maximum per lifeline / 3 meters minimum between users.

REF : 102397



Inspection procedure

A mandatory annual inspection must be carried out by SOMAIN or an approved partner.

